

MINING SAFETY FOR HEAVY DUTY SERIES LIGHTING AND ALARMS



Foshan Xingyuan Auto Accessories Co.,Ltd
Xingyuan LED Lighting (HK) Industrial Limited

Add:NO.2, 11th Street, Fengxiang Road, Fengxiang Industrial Area,
Daliang, Shunde District, Foshan City, Guangdong, China
Tel: +86-757-22667066 22227365 E-mail: admin@xingyuan-lighting.com
<http://www.xingyuan-led.com> <http://www.xingyuanled.com.cn>

LED Mining Strobe Beacons light



LED Mining Strobe Beacons light



EMC ECE R10 R65

Item NO.: XYAL-1377




DESCRIPTION

- .Multi-Voltage: LED 12-24V DC;XENON 12-48V DC
- .High Intensity: 5730 High Power Or Xenon
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .LED Color :Amber,Red,Blue
- .Base Type:
 - .Screw Base + Two Wire
 - .Magnetic Base + Spring Cable & Cigar Plug
- .Base Material:ABS,Aluminum
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP67

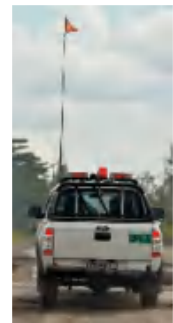


EMC ECE R10 R65 SAE

Item NO.: XYAL-1651

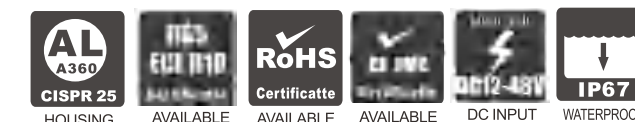

DESCRIPTION

- .Multi-Voltage: LED 12-24V DC;XENON 12-80V DC
- .High Intensity: 5730 High Power Or Xenon
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .LED Color :Amber,Red,Blue
- .Base Type:
 - .Screw Base + Two Wire
 - .Magnetic Base + Spring Cable & Cigar Plug
- .Base Material:ABS
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP65

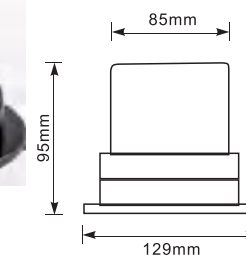

APPLICATION



LED Mining Strobe Beacons light


EMC ECE R10 R65

Item NO.: XYAL-1608/09



DESCRIPTION

- .Multi-Voltage: LED 12-24V DC;XENON 12-80V DC
- .High Intensity: 5730 High Power Or Xenon
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .LED Color :Amber,Red,Blue
- .Base Type:
- .Screw Base + Two Wire
- .Base Material:ABS
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP65

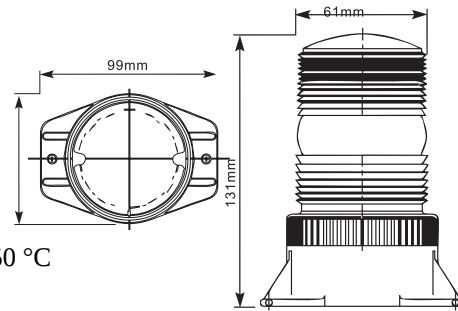


Item NO.: XYAL-1303

EMC ECE R10 R65



DESCRIPTION

- .Multi-Voltage: LED 12-24V DC;XENON 12-48V DC
- .High Intensity: 5730 High Power Or Xenon
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .LED Color :Amber,Red,Blue
- .Base Type:
- .Screw Base + Two Wire
- .Magnetic Base + Spring Cable & Cigar Plug
- .Base Material:ABS
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP65

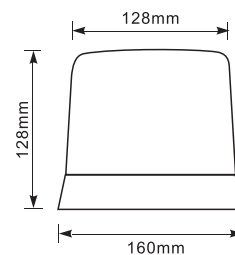

APPLICATION



LED Mining Strobe Beacons light


EMC ECE R10 R65

Item NO.: XYAL-1616




DESCRIPTION

- .Multi-Voltage: LED 12-24V DC;XENON 12-80V DC
- .High Intensity: 5730 High Power Or Xenon
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .LED Color :Amber,Red,Blue
- .Base Type:
- .Screw Base + Two Wire
- .Magnetic Base + Spring Cable & Cigar Plug
- .Base Material:ABS
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP65

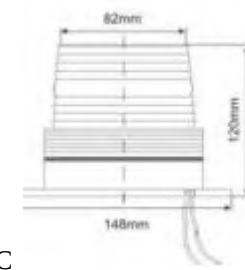

Item NO.: XYAL-1869

EMC ECE R10 R65

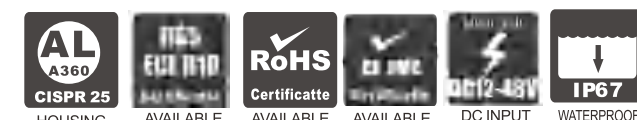

DESCRIPTION

- .Multi-Voltage: LED 12-24V DC;Halogen12V or 24V DC
- .High Intensity: 5730 High Power Or Halogen
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .LED Color :Amber,Red,Blue
- .Base Type:
- .Screw Base + Two Wire
- .Magnetic Base + Spring Cable & Cigar Plug
- .Base Material:ABS
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP65



APPLICATION



LED Mining Strobe Beacons light


EMC ECE R10 R65

Item NO.: XYAL-2138



DESCRIPTION

- .Multi-Voltage: LED 12-24V DC;Xenon12-48V DC
- .High Intensity: 5730 High Power Or Xenon
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .LED Color :Amber,Red,Blue
- .Base Type:
- .Screw Base + Two Wire
- .Magnetic Base + Spring Cable & Cigar Plug
- .Base Material:ABS
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP65

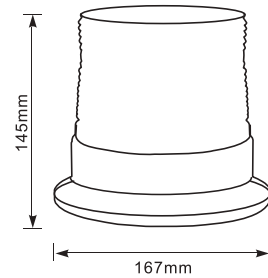

Item NO.: XYAL-2139

EMC ECE R10 R65



DESCRIPTION

- .Multi-Voltage: LED 12-24V DC;Halogen12 or 24V DC
- .High Intensity: 5730 High Power Or Halogen
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .LED Color :Amber,Red,Blue
- .Base Type:
- .Screw Base + Two Wire
- .Magnetic Base + Spring Cable & Cigar Plug
- .Base Material:ABS
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP65



APPLICATION



LED Mining Strobe Beacons light

EMC ECE R10 R65

Item NO.: XYAL-2140



DESCRIPTION

- .Multi-Voltage: LED 12-24V DC;Halogen12 or 24V DC
- .High Intensity: 5730 High Power Or Halogen
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .LED Color :Amber,Red,Blue
- .Base Type:
- .Screw Base + Two Wire
- .Magnetic Base + Spring Cable & Cigar Plug
- .Base Material:ABS
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP65



Item NO.: XYAL-2141

EMC ECE R10 R65



DESCRIPTION

- .Multi-Voltage: 12 or 24V DC
- .High Intensity: Halogen
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .LED Color :Amber,Red,Blue
- .Base Type:
- .Screw Base + Two Wire
- .Magnetic Base + Spring Cable & Cigar Plug
- .Base Material:ABS
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP65



APPLICATION



LED Mining Strobe Beacons light


EMC ECE R10 R65

Item NO.: XYAL-2142



DESCRIPTION

- .Multi-Voltage: LED 12-24V DC Xenon 12-80V
- .High Intensity: Xenon
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .LED Color :Amber,Red,Blue
- .Base Type:
- .Screw Base + Two Wire
- .Magnetic Base + Spring Cable & Cigar Plug
- .Base Material:ABS
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP65




Item NO.: XYAL-2106-A/C



DESCRIPTION

- .Multi-Voltage: LED 12V/24VDC; 12-24V DC
- .High Intensity: 5730 High Power
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .cover color:Amber, clear ,Red,Blue
- .Base Type:
- . Three screws fixed
- . Screw base + double line
- . Magnetic base + spring cable and cigar plug
- . Flexible DIN
- .Base Material:Aluminum
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP65

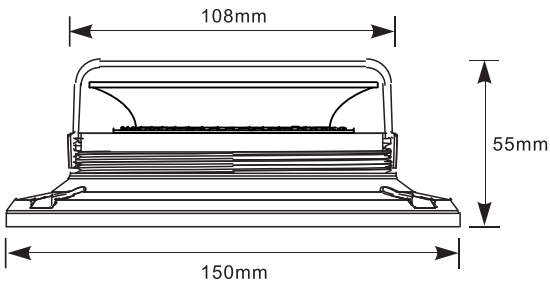

APPLICATION



LED Mining Strobe Beacons light


EMC ECE R10 R65 SAE

Item NO.: XYAL-2106-B/D



DESCRIPTION

- .Multi-Voltage: LED 12V/24VDC; 12-24V DC
- .High Intensity: 5730 High Power
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .cover color:Amber, clear ,Red,Blue
- .Base Type:
- . Three screws fixed
- . Screw base + double line
- . Magnetic base + spring cable and cigar plug
- . Flexible DIN
- .Base Material:Aluminum
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP65

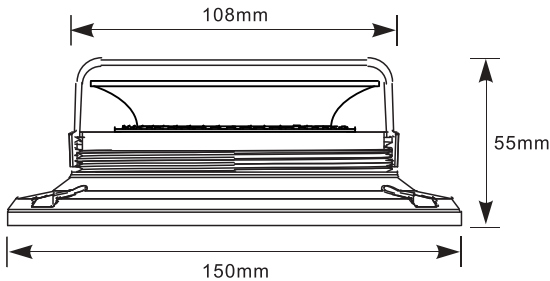


Item NO.: XYAL-2107-A/C



DESCRIPTION

- .Multi-Voltage: LED 12V/24VDC; 12-24V DC
- .High Intensity: 3535 High Power
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .cover color:Amber, clear ,Red,Blue
- .Base Type:
- . Three screws fixed
- . Screw base + double line
- . Magnetic base + spring cable and cigar plug
- . Flexible DIN
- .Base Material:Aluminum
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP65

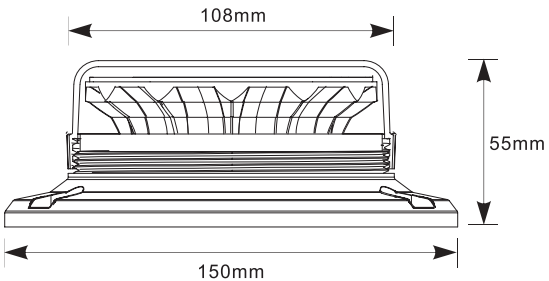

APPLICATION



LED Mining Strobe Beacons light

LED Mining Strobe Beacons light

EMC ECE R10 R65 SAE

EMC ECE R10 R65


Item NO.: XYAL-2107-B/D

Item NO.: XYAL-2136




DESCRIPTION

- .Multi-Voltage: LED 12V/24VDC; 12-24V DC
- .High Intensity: 3535 High Power
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .cover color:Amber, clear ,Red,Blue
- .Base Type:
 - . Three screws fixed
 - . Screw base + double line
 - . Magnetic base + spring cable and cigar plug
 - . Flexible DIN
- .Base Material:Aluminum
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP65

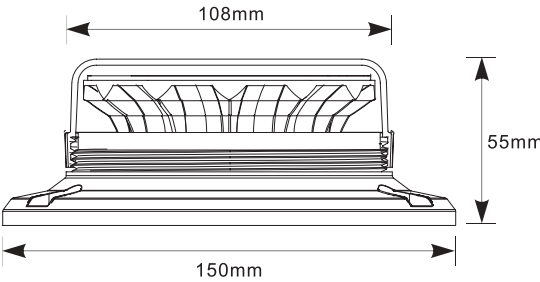

DESCRIPTION

- .Multi-Voltage: 12-24V DC
- .High Intensity:2835 High Power
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .cover color:Amber
- .Function:Dual Flashing & Rotating
- .Base Type:
 - . Screw Base
 - . Flexible DIN
- .Base Material:ABS
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP65

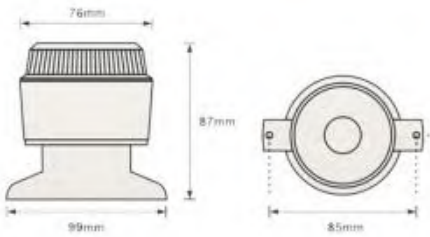

APPLICATION



APPLICATION



LED Mining Strobe Beacons light

LED Mining Strobe Beacons light


Item NO.: XYAL-1377-18W

EMC ECE R10 R65 SAE



DESCRIPTION

- .Multi-Voltage: LED 12V/24VDC; 12-24V DC
- .High Intensity: 3W High Power LED, 6pcs
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .cover color:Amber, clear
- Function Flashing(Single Flashing / Dual Flashing/ sextuple)
- .Base Type:
 - . Screw base + double line
 - . Magnetic base + spring cable and cigar plug
- .Base Material:ABS
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP65




EMC ECE R10 R65 SAE

Item NO.: XYAL-1377-36W-Double



DESCRIPTION

- .Multi-Voltage: LED 12V/24VDC; 12-24V DC
- .High Intensity: 3W High Power LED, 12pcs
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .cover color:Amber, clear
- Function Flashing(Single Flashing / Dual Flashing/ sextuple)
- .Base Type:
 - . Screw base + double line
 - . Magnetic base + spring cable and cigar plug
- .Base Material:ABS
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP65




Item NO.: XYAL-2175-18W

EMC ECE R10 R65 SAE




DESCRIPTION

- .Multi-Voltage: LED 12V/24VDC; 12-24V DC
- .High Intensity: 3W High Power LED, 6pcs
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .cover color:Amber, clear
- Function Flashing(Single Flashing / Dual Flashing/ sextuple)
- .Base Type:
 - . Screw base + double line
 - . Magnetic base + spring cable and cigar plug
- .Base Material:ABS
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP65




EMC ECE R10 R65 SAE

Item NO.: XYAL-2176-20W

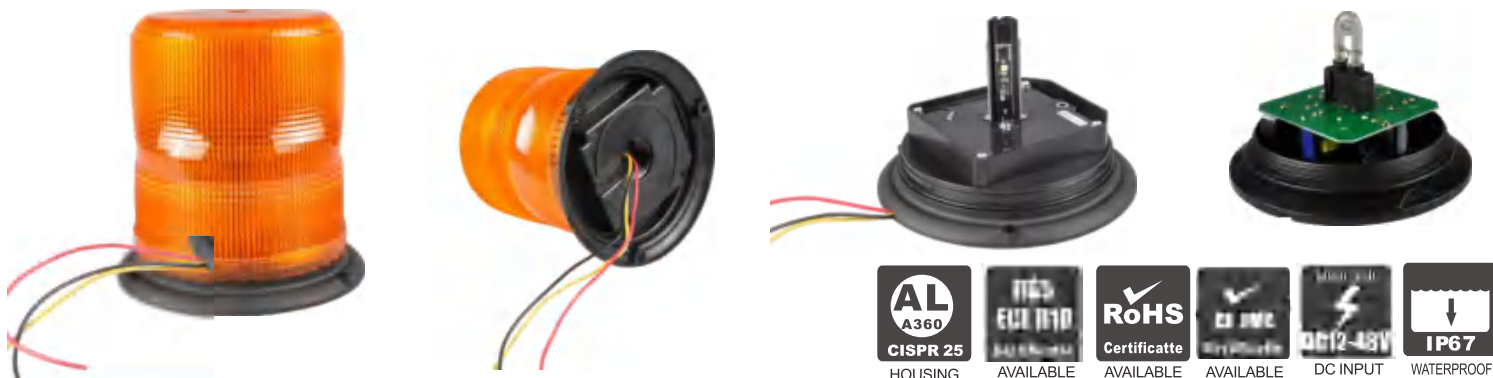

DESCRIPTION

- .Multi-Voltage: LED 12V/24VDC; 12-24V DC
- .High Intensity: 3W High Power LED, 6pcs
- .Main material:PC Lens
- .Impact resistant polycarbonate lens
- .cover color:Amber
- Function Flashing(Single Flashing / Dual Flashing/ sextuple)
- .Base Type:
 - . Screw base + double line
 - . Magnetic base + spring cable and cigar plug
- .Base Material:ABS
- .Environmental Temperature (Normal Working):-30 / +50 °C
- .Dust and Waterproof to IP65



APPLICATION



APPLICATION



LED Mining Strobe Beacons light

Item NO.:

XYAL-2159-A/C

EMC ECE R10 R65 SAE

Striple Lens



Smooth Surface lens



DESCRIPTION

- .Multi-Voltage:12-24VDC
- .ECE R65,ECE R10; SAE.
- .2835*45pcs*0.5W
- .Reverse polarity protection
- .-30to50 °C,extreme temperature reliability
- .Power cord length: 0.3M..Bracket
- .cover color:Amber
- .Base: Aluminum or ABS
- .Main material: PC Lens
- .Flashing pattern: Rotating+Flashing
- .Dust and Waterproof to IP65

Item NO.:

XYAL-2159-B/D

EMC ECE R10 R65 SAE

Striple Lens



Smooth Surface lens



DESCRIPTION

- .Multi-Voltage:12-24VDC
- .ECE R65,ECE R10; SAE.
- .2835*45pcs*0.5W
- .Reverse polarity protection
- .-30to50°C,extreme temperature reliability
- .Power cord length: 0.3M..Bracket
- .cover color:Amber
- .Base: Aluminum or ABS
- .Main material: PC Lens
- .Flashing pattern: Rotating+Flashing
- .Dust and Waterproof to IP65

APPLICATION



LED Mining Strobe Beacons light

Item NO.:

XYAL-2160-A/C

EMC ECE R10 R65 SAE

Striple Lens



Smooth Surface lens



DESCRIPTION

- .Multi-Voltage:12-24VDC
- .ECE R65,ECE R10; SAE.
- .3535*12pcs*3W
- .Reverse polarity protection
- .-30to50°C,extreme temperature reliability
- .Power cord length: 0.3M..Bracket
- .cover color:Amber
- .Base: Aluminum or ABS
- .Main material: PC Lens
- .Flashing pattern: Single flash, double flash, rotating
- .Dust and Waterproof to IP65

Item NO.:

XYAL-2160-B/D

EMC ECE R10 R65 SAE

Striple Lens



Smooth Surface lens



DESCRIPTION

- .Multi-Voltage:12-24VDC
- .ECE R65,ECE R10; SAE.
- .3535*12pcs*3W
- .Reverse polarity protection
- .-30to50°C,extreme temperature reliability
- .Power cord length: 0.3M..Bracket
- .cover color:Amber
- .Base: Aluminum or ABS
- .Main material: PC Lens
- .Flashing pattern: Single flash, double flash, rotating
- .Dust and Waterproof to IP65

APPLICATION



LED Mining Strobe Beacons light

EMC ECE R10 R65

Item NO.: XYAL-2193-27W



DESCRIPTION

Voltage DC10-30V
Light Source 3W High Power LED, 9pcs
Function Flashing(rotating and flashing)
Lens Material PC
cover color: Red,Blue,Amber Clear
Optional Lens Color: Red,Blue,White,Amber
Base Type Screw Base + Two Wire
Magnetic Base + Spring Cable & Cigar Plug
Base Material ABS
Environmental Temperature (Normal Working) -40 / +75 °C
EMC :ECE R65
Waterproof IP65



EMC ECE R10 R65



DESCRIPTION

Voltage DC10-30V
Light Source 3W High Power LED, 18pcs
Function Flashing(rotating and flashing)
Lens Material PC
cover color: Red,Blue,Amber Clear
Optional Lens Color: Red,Blue,White,Amber
Base Type Screw Base + Two Wire
Magnetic Base + Spring Cable & Cigar Plug
Base Material ABS
Environmental Temperature (Normal Working) -40 / +75 °C
Waterproof IP65



APPLICATION



LED Mining Strobe Beacons light

EMC ECE R10 R65

Item NO.: XYAL-2194-27W



DESCRIPTION

Voltage DC10-30V
Light Source 3W High Power LED, 9pcs
Function Flashing(rotating and flashing)
Lens Material PC
cover color: Red,Blue,Amber Clear
Optional Lens Color: Red,Blue,White,Amber
Base Type Screw Base + Two Wire
Magnetic Base + Spring Cable & Cigar Plug
DIN A fixing
Base Material ABS
Environmental Temperature (Normal Working) -40 / +75 °C
Waterproof IP65



EMC ECE R10 R65

Item NO.: XYAL-2196-6W



DESCRIPTION

Voltage DC10-36V
Light Source 0.5W LED, 12pcs
Function Flashing(rotating and flashing)
Lens Material PC
cover color: Red,Blue,Amber Clear
Optional Lens Color: Red,Blue,White,Amber
Base Type Screw Base + Two Wire
Base Material ABS
Environmental Temperature (Normal Working) -40 / +75 °C
Waterproof IP65



APPLICATION



LED Mining Strobe Beacons light

EMC ECE R10 R65

Item NO.: XYAL-2197-55W




DESCRIPTION

Voltage DC12V
Light Source 1PC OF 55W LED
Function Flashing(rotating)
Lens Material PC
cover color: Red,Blue,Amber Clear
Optional Lens Color: Red,Blue,White,Amber
Base Material ABS
Environmental Temperature (Normal Working) -40 / +75 °C
EMC :ECE R65
Waterproof IP65




EMC ECE R10 R65

Item NO.: XYAL-2145

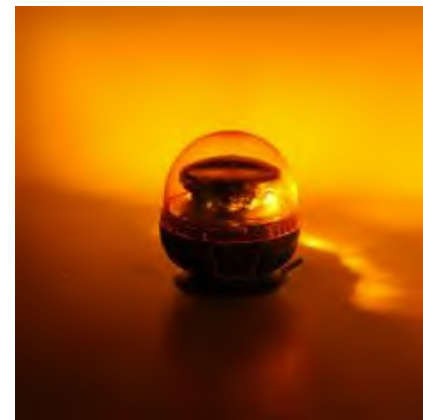

DESCRIPTION

.Voltage DC9-30V
.Light Source SMD3535 3W LED
.Function Rotating
.Battery Type 18650 Li-On Rechargeable Battery
.Capacity 7.4V/4000MA
.Lens Material PC
.Lens Color Amber
.Base Type Enhanced Magnetic Base with Sucking Cup
.Base Material ABS
.Temperature for Normal Working -30 / +50 °C
.Flashing Frequency 125Rpm

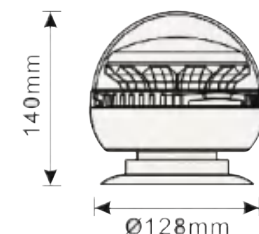

APPLICATION



LED Mining Strobe Beacons light

EMC ECE R10 R65

Item NO.: XYAL-2198-16W




DESCRIPTION

Voltage DC10-30V
Light Source 1W High Power LED, 16pcs
Function Flashing(rotating and flashing)
Lens Material PC
cover color: Red,Blue,Amber Clear
Optional Lens Color: Red,Blue,White,Amber
Base Material ABS
Environmental Temperature (Normal Working) -40 / +75 °C
EMC :ECE R65
Waterproof IP65




EMC ECE R10 R65

Item NO.: XYAL-2146

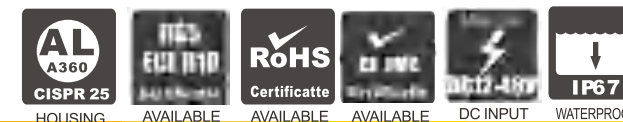

DESCRIPTION

.Voltage DC9-30V
.Light Source SMD2835
.Function Single Flashing/Dual Flashing/Rotating
.Battery Type 18650 Li-On Rechargeable Battery
.Capacity 7.4V/4000MA
.Lens Material PC
.Lens Color Amber
.Base Type Enhanced Magnetic Base with Sucking Cup
.Base Material ABS
.Temperature for Normal Working -30 / +50 °C
.Flashing Frequency 125Times/Minute



APPLICATION



LED Mining Strobe Beacons light

EMC ECE R10 R65

Item NO.: XYAL-2207-XENON



DESCRIPTION

Voltage DC12-110V
Light Source xenon A tube
Function Flashing(single flash)
Lens Material PC
Optional Lens Color Yellow
Base Type Screw Base + Two Wire
Base Material ABS
Environmental Temperature (Normal Working) -30 / +50 °C
EMC :ECE R 10
Waterproof IP67

EMC ECE R10 R65

Item NO.: XYAL-2208-XENON



DESCRIPTION

Voltage DC12-110V
Light Source xenon A tube
Function Flashing(single flash)
Lens Material PC
Optional Lens Color Yellow
Base Type Screw Base + Two Wire
Base Material ABS
Environmental Temperature (Normal Working) -30 / +50 °C
EMC :ECE R 10
Waterproof IP67

APPLICATION



LED Mining Strobe Beacons light

HEAVY DUTY MINE LIGHT BAR



HEAVY DUTY MINE LIGHT BAR

EMC ECE R10 R65

Item NO.: XYAL-1381-A-1.2m




DESCRIPTION


ECE65 Approved Performance
EC95/54 EMC Approved
12v or dual voltage(12v/24v) options
Reverse polarity protection
Meets IP56 international protection standards
-30to50,extreme temperature reliability
include led beacon 1 piece, backup alarm 1 piece,multi-function tail light 2 sets
Power cord length: 7M..
Bracket(Optional)
Enhanced Magnetic Base with Sucking Cup(Optional)



Assemble Instruction

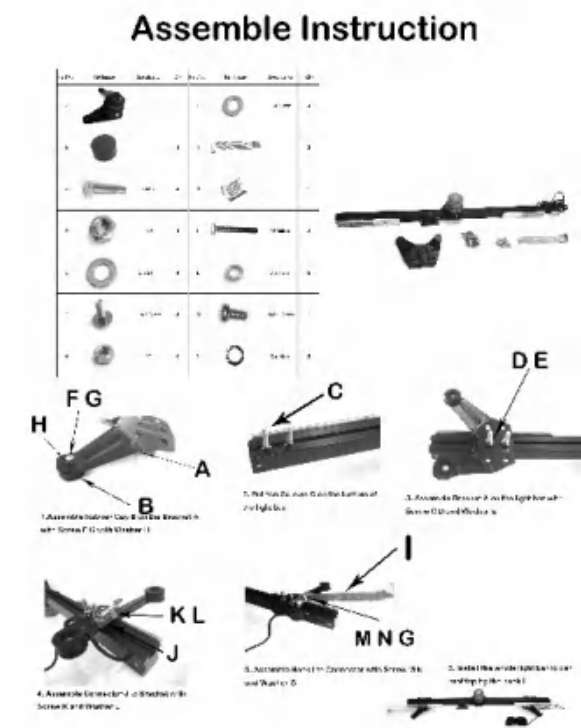

Instruction Manual

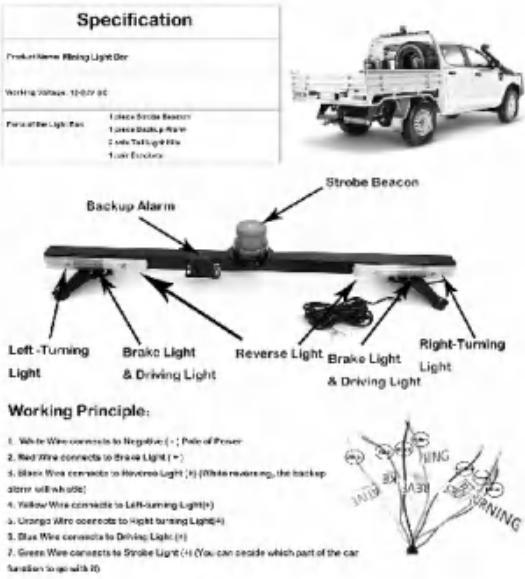

APPLICATION



HEAVY DUTY MINE LIGHT BAR

EMC ECE R10 R65

Item NO.: XYAL-1382-B-1.2m




DESCRIPTION

ECE65 Approved Performance
EC95/54 EMC Approved
12v or dual voltage(12v/24v) options
Reverse polarity protection
Meets IP56 international protection standards
-30to50°C,extreme temperature reliability
include WL69-led beacon 1 piece, ES46-backup alarm 1 piece,multi-function tail light 2 sets
Power cord length: 7M
Bracket(Optional)
Enhanced Magnetic Base with Sucking Cup(Optional)



Assemble Instruction

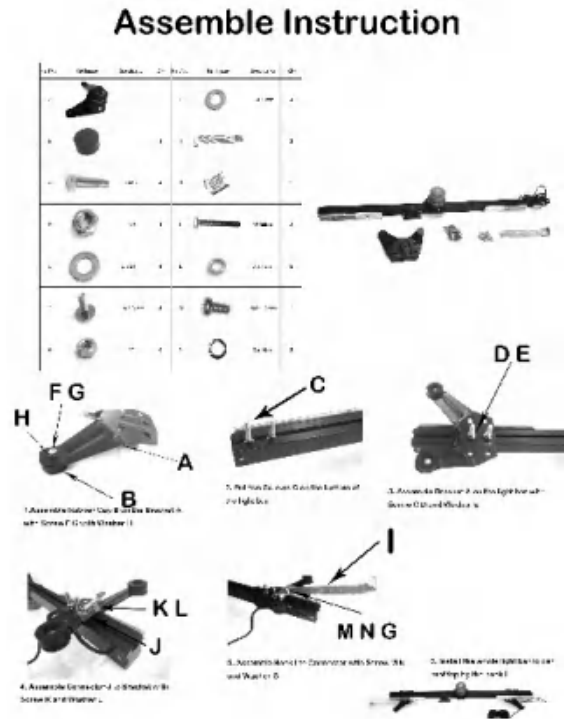

APPLICATION



HEAVY DUTY MINE LIGHT BAR

EMC ECE R10 R65

Item NO.: XYAL-1383-C-1.2m




DESCRIPTION

ECE65 Approved Performance
EC95/54 EMC Approved
12v or dual voltage(12v/24v) options
Reverse polarity protection
Meets IP56 international protection standards
-30to50°C,extreme temperature reliability
include led beacon 1 piece, backup alarm 1 piece,
multi-function tail light 2 sets,24W LED work light 2 pieces
Power cord length: 7M
Bracket(Optional)
Enhanced Magnetic Base with Sucking Cup(Optional)



Assemble Instruction

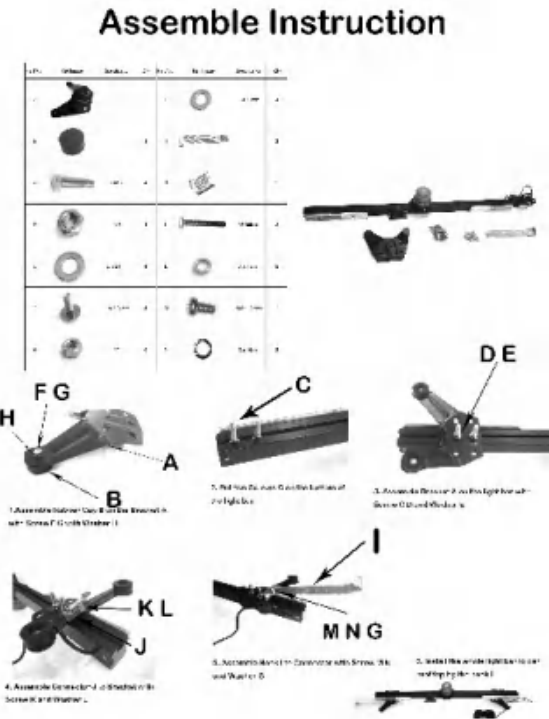

APPLICATION



HEAVY DUTY MINE LIGHT BAR

EMC ECE R10 R65

Item NO.:XYAL-1384-D-1.2m




DESCRIPTION

ECE65 Approved Performance
EC95/54 EMC Approved
12v or dual voltage(12v/24v) options
Reverse polarity protection
Meets IP56 international protection standards
-30to50°C,extreme temperature reliability
include led beacon 1 piece, backup alarm 1 piece,
multi-function tail light 2 sets
Power cord length: 7M
Bracket(Optional)
Enhanced Magnetic Base with Sucking Cup(Optional)



Assemble Instruction

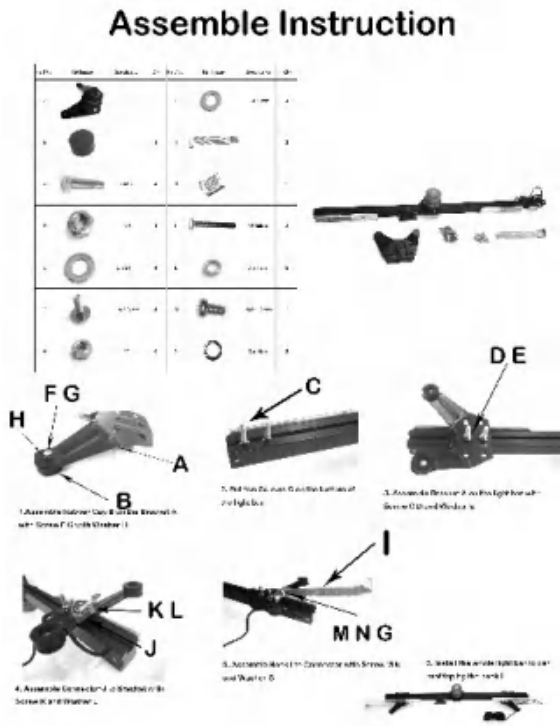

APPLICATION




HEAVY DUTY MINE LIGHT BAR

EMC ECE R10 R65

XYAL-1385-E-1.2m

Item NO.:

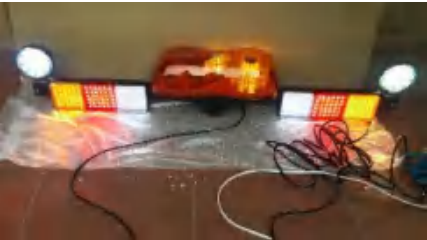


DESCRIPTION

ECE65 Approved Performance
EC95/54 EMC Approved
12v or dual voltage(12v/24v) options
Reverse polarity protection
Meets IP56 international protection standards
-30to50°C,extreme temperature reliability
include halogen beacon 1 piece, 24w led work light 2 pieces ,
backup alarm 1 piece,multi-function tail light 2 sets
Power cord length: 7M
Bracket(Optional)
Enhanced Magnetic Base with Sucking Cup(Optional)



Assemble Instruction

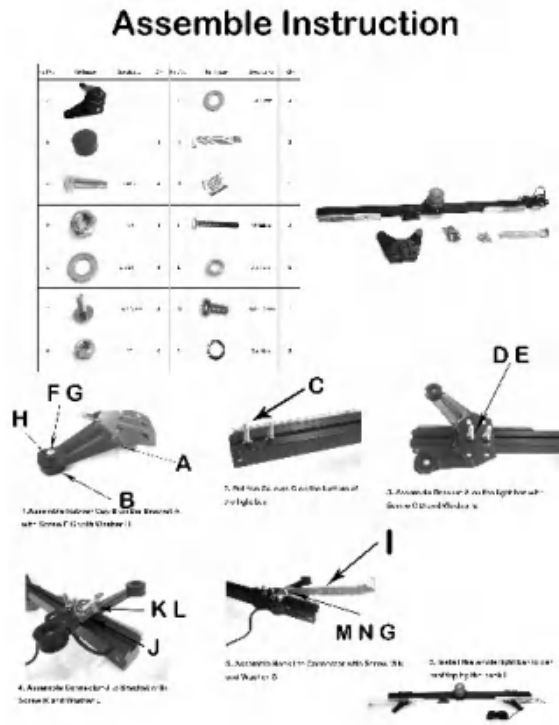

APPLICATION



HEAVY DUTY MINE LIGHT BAR

EMC ECE R10 R65

Item NO.: XYAL-1386-F-1.2m




DESCRIPTION

ECE65 Approved Performance
EC95/54 EMC Approved
12v or dual voltage(12v/24v) options
Reverse polarity protection
Meets IP56 international protection standards
-30to50°C,extreme temperature reliability
inculed led beacon 1 pieces, led strobe light(led-4) 2 pieces,
backup alarm 1 piece,multi-function tail light 2 sets
Power cord length: 7M
Bracket(Optional)
Enhanced Magnetic Base with Sucking Cup(Optional)




Assemble Instruction

Assemble Instruction

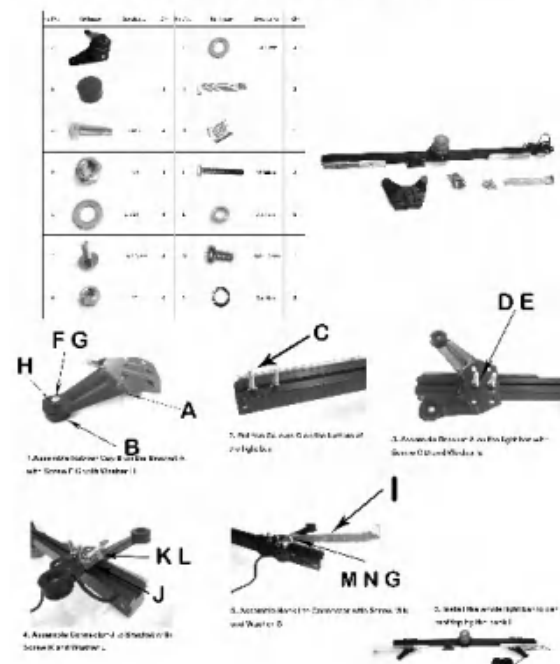

Instruction Manual

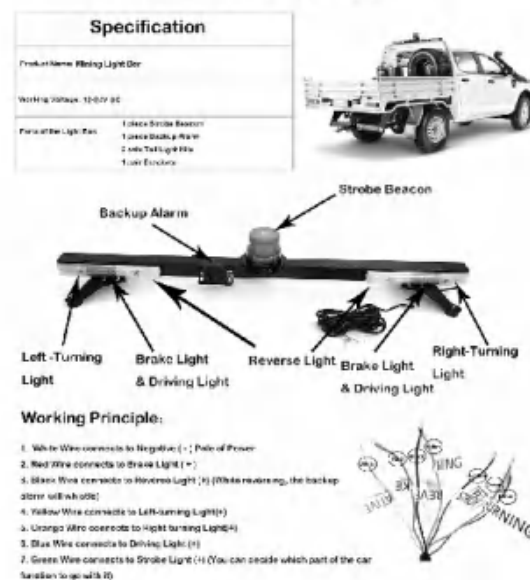


APPLICATION



HEAVY DUTY MINE LIGHT BAR

EMC ECE R10 R65

Item NO.: XYAL-1387-G-1.2m

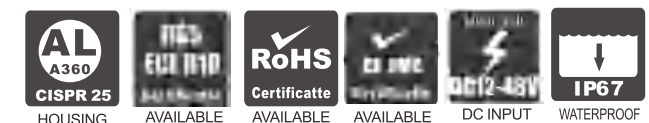


DESCRIPTION

ECE65 Approved Performance
EC95/54 EMC Approved
12v or dual voltage(12v/24v) options
Reverse polarity protection
Meets IP56 international protection standards
-30to50°C,extreme temperature reliability
inculed wl27-led beacon 1 pieces, led strobe light 2 pieces,
backup alarm 1 piece,multi-function tail light 2 sets
Power cord length: 7M
Bracket(Optional)
Enhanced Magnetic Base with Sucking Cup(Optional)




Assemble Instruction

Assemble Instruction

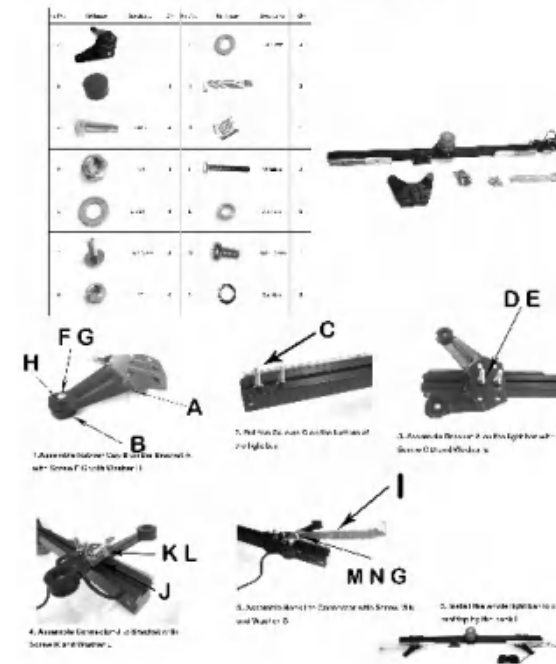

Instruction Manual

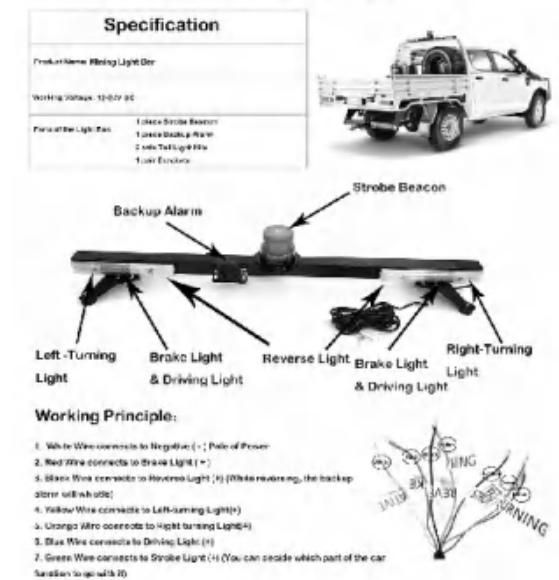

APPLICATION



HEAVY DUTY MINE LIGHT BAR

EMC ECE R10 R65

Item NO.: XYAL-1388-H-1.2m




DESCRIPTION

ECE65 Approved Performance
EC95/54 EMC Approved
12v or dual voltage(12v/24v) options
Reverse polarity protection
Meets IP56 international protection standards
-30to50°C,extreme temperature reliability
inculded w127-led beacon 1 pieces, backup alarm 1 piece,
multi-function tail light 2 sets,24W LED work light 2 pieces
Power cord length: 7M



Assemble Instruction

Assemble Instruction

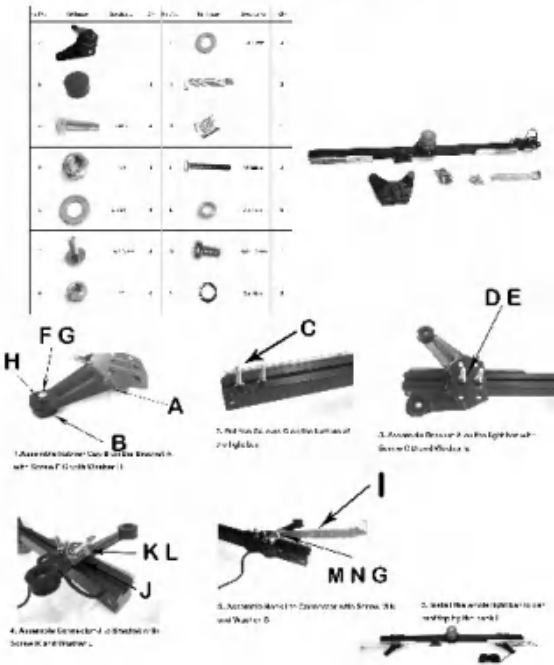

Instruction Manual



APPLICATION



HEAVY DUTY MINE LIGHT BAR

EMC ECE R10 R65

Item NO.: XYAL-1390-J-1.2m




DESCRIPTION

ECE65 Approved Performance
EC95/54 EMC Approved
12v or dual voltage(12v/24v) options
Reverse polarity protection
Meets IP56 international protection standards
-30to50°C,extreme temperature reliability
include led beacon 2 pieces, led strobe light 2 pieces,
18w led work light 2 pieces, backup alarm 1 piece,multi-function tail light 2 sets
Power cord length: 7M
Bracket(Optional)
Enhanced Magnetic Base with Sucking Cup(Optional)



Assemble Instruction

Assemble Instruction

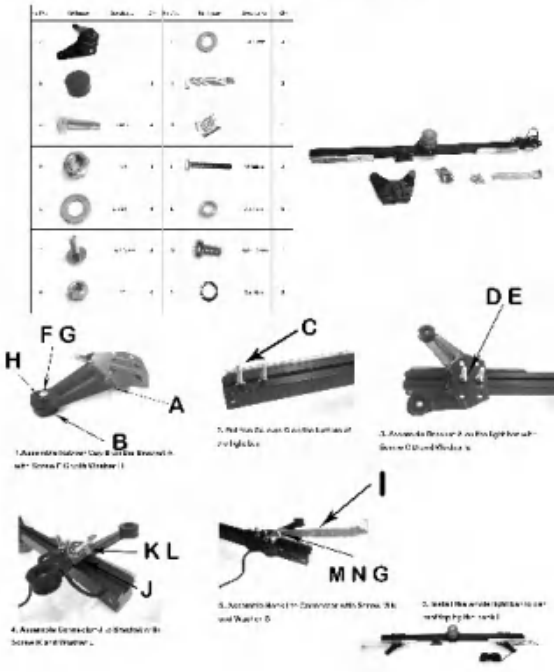

Instruction Manual




APPLICATION



HEAVY DUTY MINE LIGHT BAR

EMC ECE R10 R65

Item NO.: XYAL-1391-K-1.2m

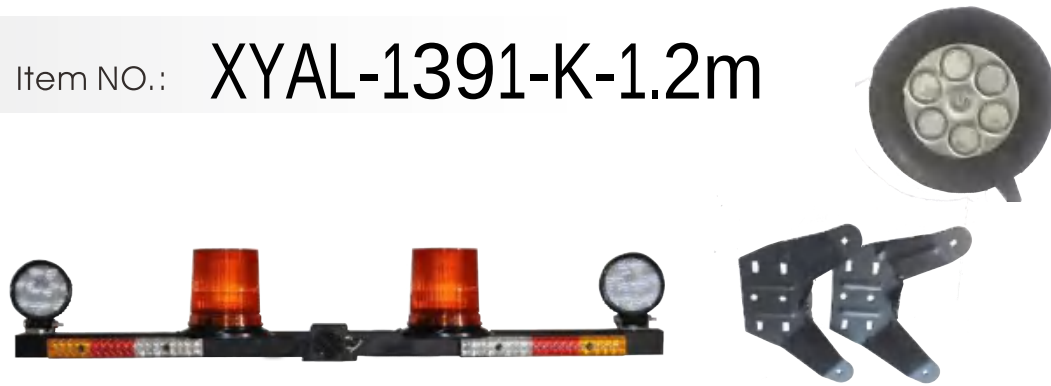


DESCRIPTION

ECE65 Approved Performance
EC95/54 EMC Approved
12v or dual voltage(12v/24v) options
Reverse polarity protection
Meets IP56 international protection standards
-30to50°C,extreme temperature reliability
include led beacon 2 pieces, 18w led work light 2 pieces,
backup alarm 1 piece,multi-function tail light 2 sets
Power cord length: 7M
Bracket(Optional)
Enhanced Magnetic Base with Sucking Cup(Optional)




Assemble Instruction

Assemble Instruction

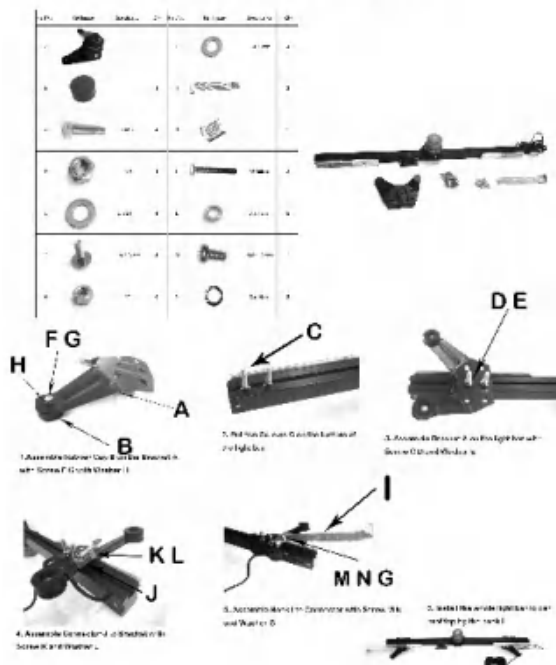

Instruction Manual

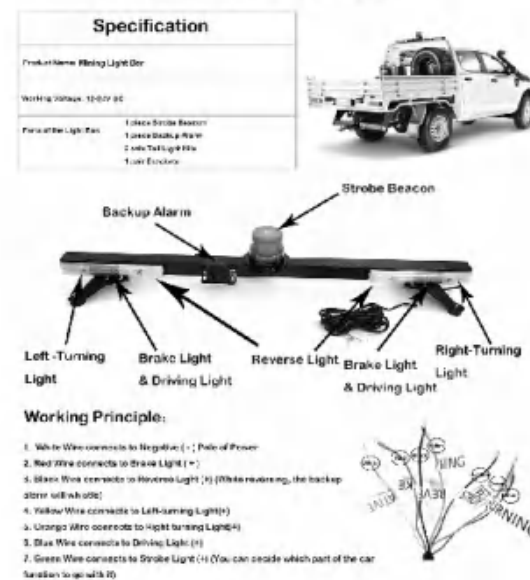

APPLICATION



HEAVY DUTY MINE LIGHT BAR

EMC ECE R10 R65

Item NO.: XYAL-1392-L-1.2m




DESCRIPTION

ECE65 Approved Performance
EC95/54 EMC Approved
12v or dual voltage(12v/24v) options
Reverse polarity protection
Meets IP56 international protection standards
-30to50°C,extreme temperature reliability
include led beacon 1 pieces, 24w led work light 2 pieces,
backup alarm 1 piece,multi-function tail light 2 sets
Power cord length: 7M
Bracket(Optional)
Enhanced Magnetic Base with Sucking Cup(Optional)




Assemble Instruction

Assemble Instruction

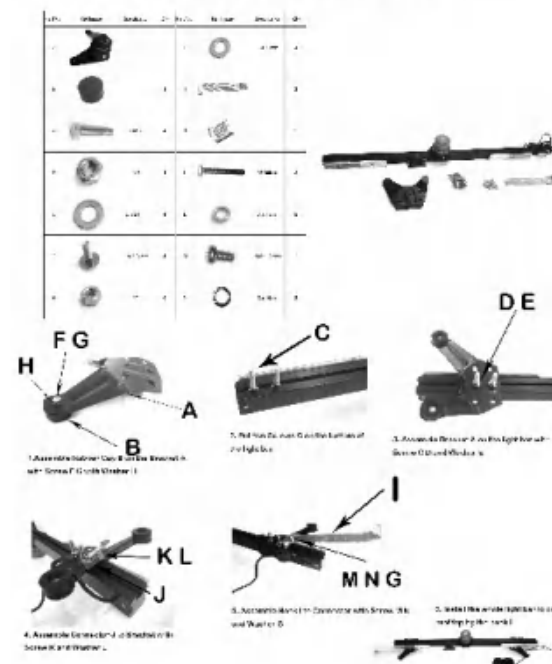

Instruction Manual

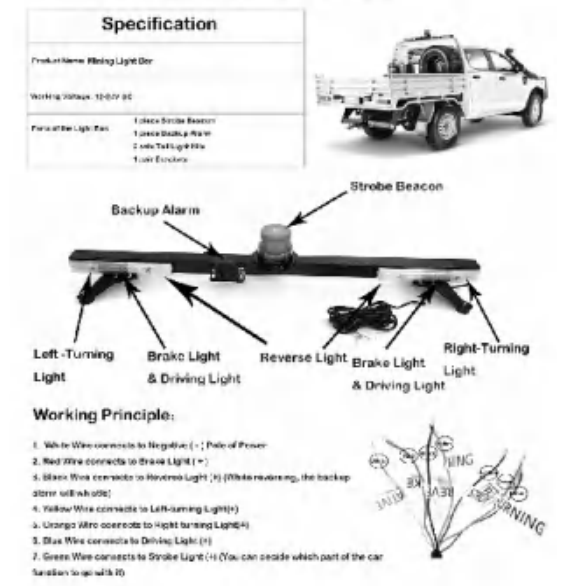

APPLICATION



HEAVY DUTY MINE LIGHT BAR

EMC ECE R10 R65

Item NO.: XYAL-1393-M-1.2m




DESCRIPTION

ECE65 Approved Performance
EC95/54 EMC Approved
12v or dual voltage(12v/24v) options
Reverse polarity protection
Meets IP56 international protection standards
-30to50°C,extreme temperature reliability
inculed led beacon 1 pieces, led strobe light 2 pieces,
backup alarm 1 piece,multi-function tail light 2 sets,
Turn left and Turn rgught marker light 4 pieces
Power cord length: 7M
Bracket(Optional)
Enhanced Magnetic Base with Sucking Cup(Optional)




Assemble Instruction

Assemble Instruction

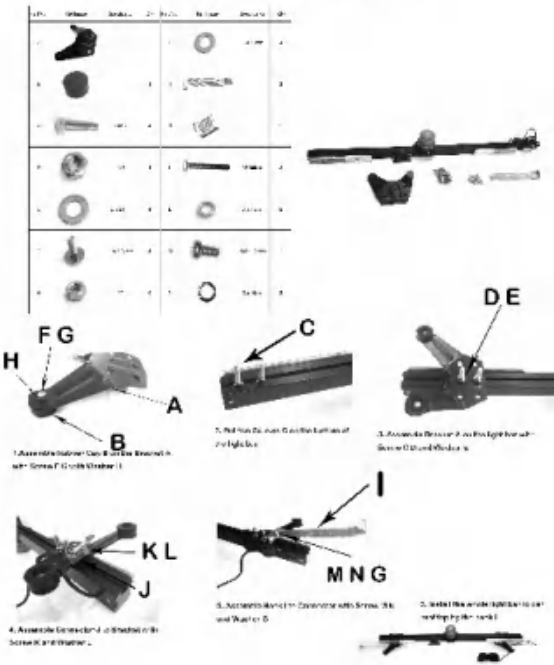

Instruction Manual

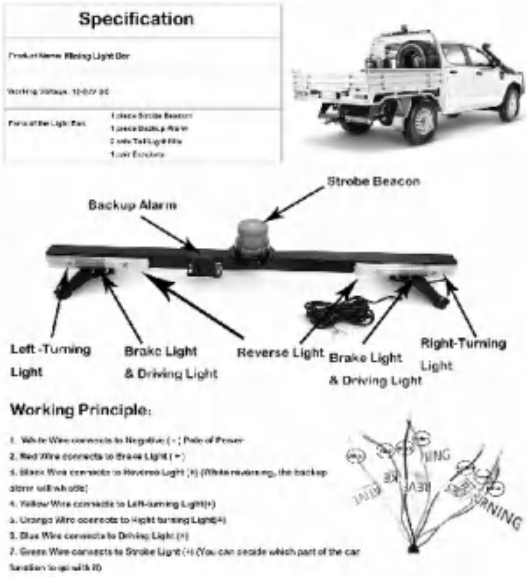

APPLICATION



HEAVY DUTY MINE LIGHT BAR

EMC ECE R10 R65

Item NO.: XYAL-1395-0-1.2m




DESCRIPTION

ECE65 Approved Performance
EC95/54 EMC Approved
12v or dual voltage(12v/24v) options
Reverse polarity protection
Meets IP56 international protection standards
-30to50°C,extreme temperature reliability
inculed led beacon 1 pieces, 10W led work light 2 pieces,
backup alarm 1 piece,multi-function tail light 2 sets
Power cord length: 7M
Bracket(Optional)
Enhanced Magnetic Base with Sucking Cup(Optional)




Assemble Instruction

Assemble Instruction

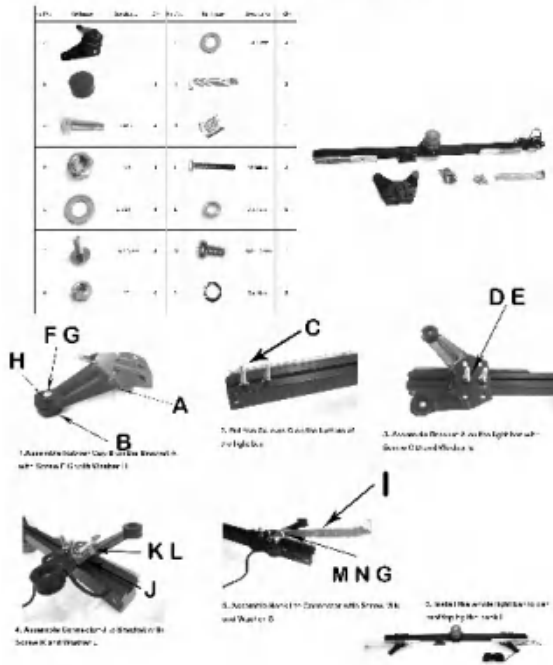

Instruction Manual

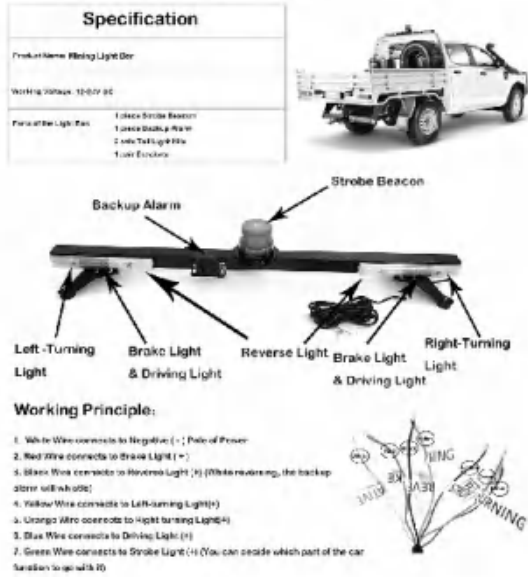


APPLICATION



HEAVY DUTY MINE LIGHT BAR


EMC ECE R10 R65

Item NO.: XYAL-2177-1.12m

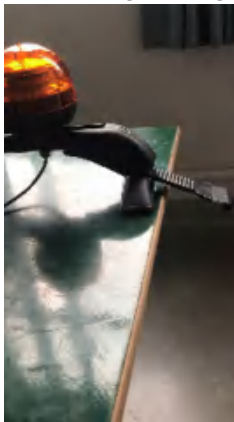

DESCRIPTION

ECE65 R10 Approved Performance
EC95/54 EMC Approved
12v or dual voltage(12v/24v) options
Reverse polarity protection
Meets IP56 international protection standards
-30to50,extreme temperature reliability
Length: 1120 mm;
Includes: 2 x led beacons
Power cord length: 7M





EMC ECE R10 R65

Item NO.: XYAL-2179-1.12m



DESCRIPTION

ECE65 R10 Approved Performance
EC95/54 EMC Approved
12v or dual voltage(12v/24v) options
Reverse polarity protection
Meets IP56 international protection standards
-30to50,extreme temperature reliability
Length: 1120 mm;
Includes: 2 x led beacons 1 x led light bar
Power cord length: 7M



APPLICATION



HEAVY DUTY MINE LIGHT BAR


EMC ECE R10 R65

Item NO.: XYAL-2178-1.12M



DESCRIPTION

ECE65 R10 Approved Performance
EC95/54 EMC Approved
12v or dual voltage(12v/24v) options
Reverse polarity protection
Meets IP56 international protection standards
-30to50,extreme temperature reliability
Length: 1120 mm;
Includes: 2 x led beacons
Power cord length: 7M





EMC ECE R10 R65

Item NO.: XYAL-2180-1.12m



DESCRIPTION

ECE65 R10 Approved Performance
EC95/54 EMC Approved
12v or dual voltage(12v/24v) options
Reverse polarity protection
Meets IP56 international protection standards
-30to50,extreme temperature reliability
Length: 1120 mm;
Includes: 2 x led beacons 1 x led light bar
Power cord length: 7M




APPLICATION



HEAVY DUTY MINE LIGHT BAR



EMC ECE R10 R65

Item NO.: XYAL-2181-1.12m

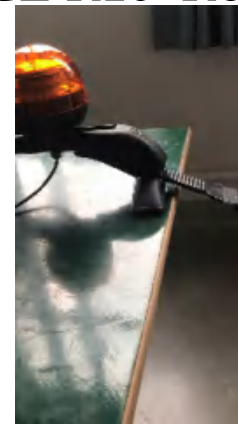


DESCRIPTION

ECE65 R10 Approved Performance
EC95/54 EMC Approved
12v or dual voltage(12v/24v) options
Reverse polarity protection
Meets IP56 international protection standards
-30to50,extreme temperature reliability
Length: 1120 mm;
Includes: Includes: 2 x work lights
1 x led light bar
Power cord length: 7M

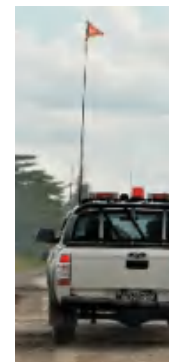



EMC ECE R10 R65

Item NO.: XYAL-2182-1.12m

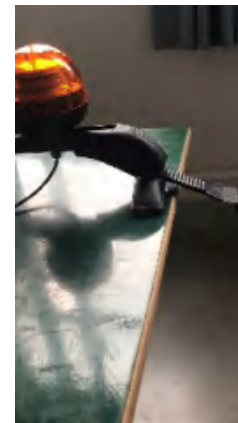

DESCRIPTION

ECE65 R10 Approved Performance
EC95/54 EMC Approved
12v or dual voltage(12v/24v) options
Reverse polarity protection
Meets IP56 international protection standards
-30to50,extreme temperature reliability
Length: 1120 mm;
Includes: Includes: 2 x work lights
1 x led light bar
Power cord length: 7M




APPLICATION



HEAVY DUTY LED SAFETY WHIPS

Item NO.: XYAL-2144-2.4M/3M/3.6M

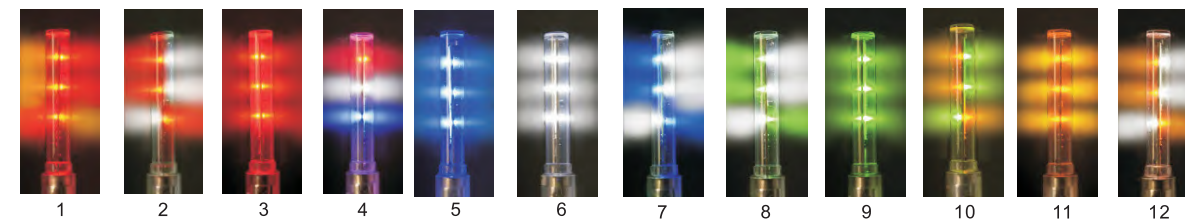

APPLICATION




HEAVY DUTY LED SAFETY WHIPS

HEAVY DUTY LED SAFETY WHIPS

Item NO.: XYAL-2144-1.2/1.5/1.8/2.4/3/3.6M

Strong magnetic base

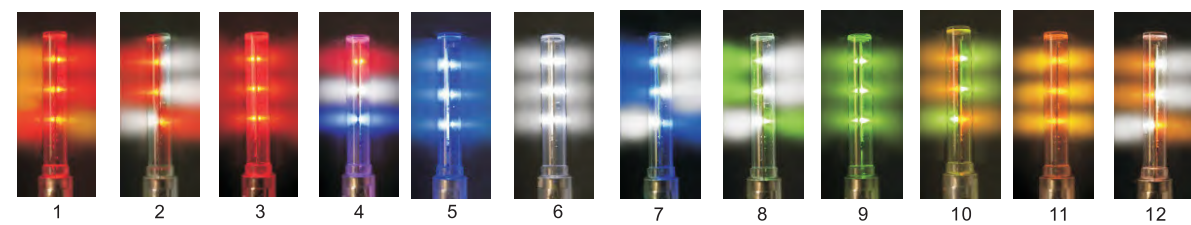


APPLICATION




BACKUP ALARM




XYAL-1656




XYAL-1657




XYAL-2150

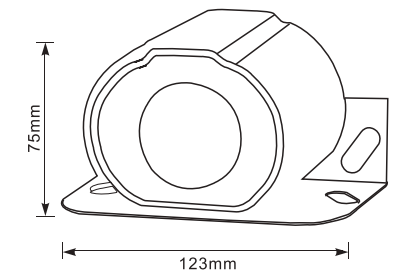


XYAL-1658




XYAL-1659




XYAL-2152




XYAL-2153



XYAL-2154



XYAL-2155



APPLICATION



APPLICATION

